



LINK+

CONNECTING LANYARD 9582

- 25 mm
- Durable polyamide webbing
- Including connecting link

Link is a connecting lanyard in polyamide webbing with one sewn loop and a connecting link.

SEGMENTS

- ✓ General industry

ARTICLES

012265104	Cresto, Link+, 0.5m
-----------	---------------------

OVERVIEW

Link+ is a connecting lanyard with a thickness of 25 mm in durable polyamide webbing. The lanyard has a sewn loop and a stainless connecting link.

Link+ is only used to extend the connecting point in the back of the harness to easily anchor to horizontal self retractable lanyards (SRL) above the head.

CRESTO GROUP

Diabasgatan 16
254 68 Helsingborg
Sweden

T. +46 (0)42 563 00
E. support@crestogroup.com
www.crestogroup.com

CRESTO GROUP
EXPECT MORE

SPECIFICATION

PRODUCT PROPERTIES

Attaching connector 1	Stainless connecting link
Energy absorber	No
Fall indicator	No
Maximum number of users	1
Maximum load (kg)	140.0
Minimum working temperature (c)	-40.0
Maximum working temperature (c)	100.0
Minimum breaking strength - MBS (kN)	22.0
Material	Polyamide
Rope	25 mm polyamid webbing

CLASSIFICATION

PPE-category	Category 3
EN-standard	EN 354 : 2010
Notified body	0402, RISE Research Institutes of Sweden, Box 857, SE-50115 Borås, Sweden

ANNUAL INSPECTION

Annual inspection	Yes, every 12 months
Life span	10 + 2 years. Product lifecycle 10 years + 2 years stock keeping
Warranty	2+1 year when registered in Inspector
Identification	Serial number
RFID	Yes

DOCUMENTS

Declaration of Conformity	Yes
Manual languages	English (EN), Swedish (SV), Norwegian (NO), Danish (DA), Finnish (FI), German (DE), French (FR), Spanish (ES)


CRESTO GROUP

Diabasgatan 16
254 68 Helsingborg
Sweden

T. +46 (0)42 563 00
E. support@crestogroup.com
www.crestogroup.com

CRESTO GROUP
EXPECT MORE

IMAGES

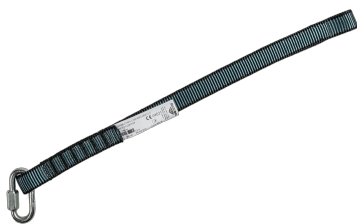

CRESTO GROUP

Diabasgatan 16
254 68 Helsingborg
Sweden

T. +46 (0)42 563 00
E. support@crestogroup.com
www.crestogroup.com

CRESTO GROUP
EXPECT MORE